

TETRAQUAD


PRODUCT OVERVIEW

Ceasefire TetraQuad is a power-packed Foam-based system that takes firefighting to the next level.. It is Ceasefire's, and probably the country's biggest, toughest standalone firefighter.

The TetraQuad multiplies the power of the Quad four times. Named after the four state-of-the-art Multi-Rotors working in sync in each of the four 62.5 ltr containers (250 ltr capacity), the Ceasefire TetraQuad brings together the efficiency of a fire extinguisher with the power of a hydrant system—without the drawbacks.



ENGINEERING DRAWINGS

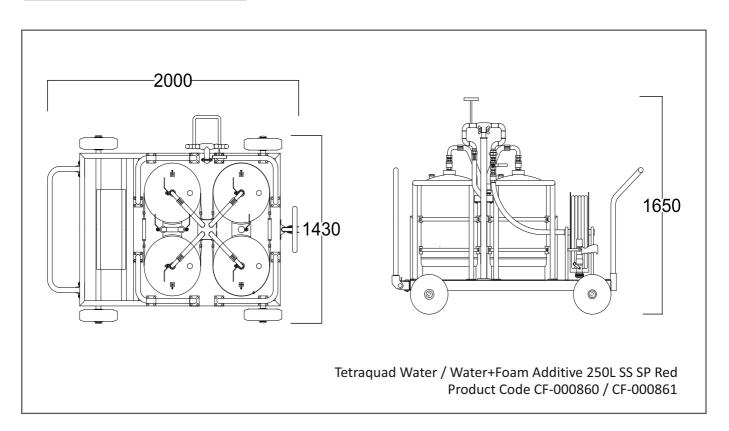



TECHNICAL SPECIFICATIONS

| Product Code | UOM | CF-000860 | CF-000861 |
|---------------------------------------|-------|---|---|
| Description | _ | Fire Extinguisher Tetraquad Water 250L SS SP Red | Fire Extinguisher Tetraquad Water+Foam Additive 250L SS SP Red |
| Capacity of Agent | L | 250-5% | 250-5% |
| Certification | — | PED | PED |
| Diameter of Shell | ММ | 450 | 450 |
| Total Height (approx.) | ММ | 1500 | 1500 |
| MOC of Shell | — | SS 304 (1.4301) | SS 304 (1.4301) |
| Mini. Wall Thickness | ММ | 2.5 | 2.5 |
| Test Pressure | BAR | 30 | 30 |
| Anti-Corrosive Treatment | - | Outer surfaces are EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000 | Outer surfaces are EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000 |
| Service Pressure | BAR | 12 to 15 | 12 to 15 |
| Type of Operating Mechanism | — | Operating Lever (Ball Valve) | Operating Lever (Ball Valve) |
| Type of Pressure Gauge | — | Magnetic Bourdon Tube Type | Magnetic Bourdon Tube Type |
| Type of Dis. Fitting & Length | ММ | EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 30000 mm (Min.) | EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 30000 mm (Min.) |
| Throw | Meter | Jet Mode : 20 meters I Spray Mode : 4 Meters | Jet Mode : 20 meters I Spray Mode : 4 Meters |
| Min. Discharge Time | Sec. | 100 to 200 | 100 to 200 |
| Fire Rating | - | A | A , IVB |
| Operating Temperature Range | °C | 5°C to +55°C | 5°C to +55°C |
| Applicable to Type of Fire | — | Class A Fire | Class A & B Fire |
| Filled Weight Range* | KG | 500 | 500 |
| Packed Weight Range (approx)** | KG | 750 | 750 |
| Packed Size Length xWidth x Height | ММ | 2000 x 1200 x 1650 | 2000 x 1200 x 1650 |
| Product Warranty | YEAR | 1 | 1 |

*It includes Empty Extinguisher, Contents, Hose / Nozzle and trolley.

**It includes Empty Extinguisher, Packaging, Contents, Hose / Nozzle and trolley



CERTIFICATIONS



PRODUCT PICTURES



*v1' Published Date is 31-07-2022.
**Regular R&D and product improvisations may lead to change in product specifications in this data sheet, without any prior notice.

CEASEFIRE INDUSTRIES UK LIMITED Call us at: 0-113-868-6666, 0-126-891-9999 www.ceasefire.co.uk